



GMDSS Portable for Survival Craft

- **Meets the strict environmental requirements for survival craft radio**

The IC-GM1600 meets temperature, thermal shock, vibration and drop resistant (from 1 m height) requirements. After passing those environmental tests, the IC-GM1600 retains 1 m depth waterproof construction as specified by IMO resolutions A.694(17), MSC149(77) and related specifications.

- **Optional high capacity Lithium battery, BP-234, has superior low temperature characteristics**

Provides more than 8 hours operating time even at -20°C .
(Duty cycle: Tx: Rx: Stand-by = 6: 6: 48)

- **Large keypad with positive button action**

- **Wide viewing angle LCD display**

- **Other features**

- One touch access to Channel 16 and call channel
- Highly visible yellow colored body
- Bright LED indicator on the top of panel
- Optional VOX headset for on-board use



OPTIONS




BP-234

<For survival craft>
BP-234 Lithium battery pack
 9.0 V/3300 mAh primary battery
 pack for GMDSS survival craft
 radio.



BP-252

<For on-board use>
BP-252 Rechargeable Li-ion battery
 7.2 V/1000 mAh (min), 1050 mAh (typ.).
 Same as supplied with some versions.

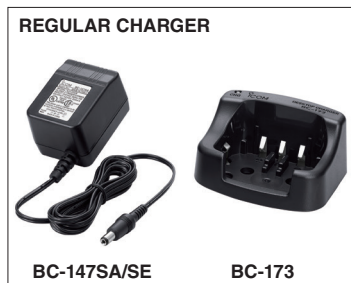

BC-147SA/SE

BC-173

<For on-board use>
BC-173 DESKTOP CHARGER
 + **BC-147SA/SE*** AC ADAPTER
 Regularly charges the battery pack,
 BP-252 in 10 hours (approx.).
 * BC-147SA for the USA plug. SE for the European plug.



BELT CLIPS

MB-103Y

MB-86

MB-103Y : Alligator type belt clip.
 Same as supplied.
MB-86 : Swivel belt clip. Prevents
 accidental dropping from
 your belt.



MB-96F

MB-96N

MB-96F : Fixed type belt hanger.
 Use with MB-103Y.
MB-96N : Swivel type belt hanger.
 Swivel joint of the MB-86
 is supplied.

Some options may not be available in some countries, or unavailable due to no T/A.
 Please ask your dealer for details.

Read all instructions enclosed with the transceiver carefully and completely before using the transceiver.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

SPECIFICATIONS

		IC-GM1600	
GENERAL		USA version	GEN version
Frequency coverage Tx/Rx		156.300–156.875 MHz	
Type of emission		16K0G3E (FM)	
Power supply requirement		7.5 V DC nominal	
Current drain (approx.)		1.0 A/0.7 A	
Tx 2 W/1 W output		200 mA	
Rx Max. audio			
Antenna impedance		50 Ω (SMA fixed-type)	
Operating temperature range		–20°C to +60°C; –4°F to +140°F	–20°C to +55°C; –4°F to +131°F
Dimensions (W × H × D) (Projections not included)		65 × 145 × 44 mm; 2.6 × 5.7 × 1.7 in	
Weight (approx.)		385 g; 13.6 oz (With BP-234)	
TRANSMITTER			
Output power (Hi/Low)		2 W/1 W	
Max. frequency deviation		±5.0 kHz	
Frequency error		±5.0 ppm	±1.5 kHz
Audio harmonic distortion		10% (at 60% deviation)	
Spurious emissions		–70 dBc typical	0.25 μV (30 MHz–1 GHz) 1.00 μV (1 GHz–2 GHz)
Adjacent channel power		70 dB	
FM Hum and noise ratio		40 dB	–
Residual modulation		–	40 dB
RECEIVER			
Sensitivity		0.25 μV typical (at 12 dB SINAD)	–2dBμ typical emf (at 20dB SINAD)
Squelch sensitivity (at threshold)		0.35 μV typical	–6 dBμ typical emf
Adjacent channel selectivity		70 dB typical	70 dB
Spurious response		70 dB typical	70 dB
Intermodulation rejection		70 dB typical	68 dB
Hum and noise		40 dB	
Audio output power (at 10% distortion 8 Ω load)		350 mW typ.	200 mW

Measurements made in accordance with TIA/EIA-603 and FCC part 80.271 for USA version. ETS 300-225-3 for General version. All stated specifications are subject to change without notice or obligation.

To comply with the requirements of GMDSS survival craft radio, the primary battery pack, BP-234, is required.

- Supplied accessories:** (* Depending on version)
- Battery pack, BP-252
 - AC adapter, BC-147SA/SE*
 - Antenna, FA-S61V
 - Battery charger, BC-173
 - Belt clip, MB-103Y
 - Neck strap

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Count on us!

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Icom Brazil
E-mail: sales@icombrazil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com